



中国认可
国际互认
检测
TESTING
CNAS L0095

Page 1 of 14 Pages

No.: RZUN012025-1935

检测报告

TEST REPORT

UN38.3

NAME OF SAMPLE:

RECHARGEABLE LI-ION BATTERY PACK

产品名称:

可充式锂离子电池组

CLIENT:

Dongguan NVT Technology Co., Ltd.

委托单位:

东莞新能德科技有限公司

CLASSIFICATION OF TEST:

Commission Test

检测类别:

委托测试

威凯检测技术有限公司
CVC Testing Technology Co., Ltd.

检测报告

TEST REPORT

No.: RZUN012025-1935

Page 2 of 14 Pages

Name of samples: RECHARGEABLE LI-ION BATTERY PACK 样品名称:可充式锂离子电池组	Type/Model: 型号规格:TPSB1B 3,86V 2150mAh 8,3Wh
Color: Black 样品颜色:黑色	Physical shape:Irregular shape 样品形状:不规则形状
Commissioned by: Dongguan NVT Technology Co., Ltd. 委托单位: 东莞新能德科技有限公司	Commissioner address:No.1 Xinghui Road, Songshan Lake Park, Dongguan City, Guangdong Province, P.R. China 委托单位地址:中国广东省东莞市松山湖园区兴惠路 1 号
Manufacturer: Dongguan NVT Technology Co., Ltd. 制造商: 东莞新能德科技有限公司	Manufacturer address:No.1 Xinghui Road, Songshan Lake Park, Dongguan City, Guangdong Province, P.R. China 制造商地址: 中国广东省东莞市松山湖园区兴惠路 1 号
Factory: Dongguan NVT Technology Co., Ltd. 生产厂: 东莞新能德科技有限公司	Factory address: No.1 Xinghui Road, Songshan Lake Park, Dongguan City, Guangdong Province, P.R. China 生产厂地址: 中国广东省东莞市松山湖园区兴惠路 1 号
Classification of test: Commission Test 检测类别: 委托测试	Quantity of sample: 8 battery packs, 30 cells 样品数量: 8 个电池组, 30 个电芯
Tested according to: 测试标准: ST/SG/AC.10/11/Rev.8/ Section 38.3	Sample identification: 样品标识序号:b1#~b8#, c1#~c30#
Receiving date: 接样日期: 2025-08-15	Means of receiving: Submitted by commissioner 接样方式: 委托单位送样
Completing date: 完成日期: 2025-09-28	Test item: 8 items 测试项目: 8 项
Test conclusion: 检测结论: The RECHARGEABLE LI-ION BATTERY PACK submitted by Dongguan NVT Technology Co., Ltd. are tested according to Section 38.3 of the Eighth revised edition of the Manual of Tests and Criteria (ST/SG/AC.10/11/Rev.8/Section 38.3). The test items are full items. The test results comply with the relevant requirements of the standard. 由东莞新能德科技有限公司送检的可充式锂离子电池组, 依据联合国《试验和标准手册》第八修订版第 38.3 节进行检测, 试验为全项目, 试验结果符合标准相关要求。 Seal of CVC CVC 盖章 Date of issue: 签发日期: 2025-09-30	

Title: Manager
批准人职务: 经理

Approved by: Zhang Siyao

Reviewed by: Zheng Feida

Tested by: Jiang Weiwei

批 准: Zhang siyao

审 核: Zheng Feida

检 测: Jiang Weiwei

Description and illustration of the sample:

样品说明及描述:

The sample's status is good

样品状况良好。

The battery (TPSB1B) is composed of cells (583336), and the connection mode is: 1S2P

电池组 (TPSB1B) 由电芯 (583336) 组成, 连接方式为: 1S2P

Cell Dimensions/电芯尺寸: 32,74mm*35,9mm*5,8mm

Watt-hour rating of each battery/ 单个电池组的瓦时数: 8,3Wh

Test item 试验项目	Sample No. 样品编号	State 状态	Remark 备注
T.1~T.5	b1#~b4#	at first cycle, in fully charged states 第一个交替充电放电周期完全充电状态	-
	b5#~b8#	after 25 cycles ending in fully charged states 第 25 个交替充电放电周期完全充电状态	-
T.6	c1#~c5#	at first cycle at 50% of the design rated capacity 第一个交替充电放电周期充电到设计额定容量的 50%	-
	c6#~c10#	after 25 cycles ending at 50% of the design rated capacity 第 25 个交替充电放电周期充电到设计额定容量的 50%	
T.7	b1#~b4#	at first cycle, in fully charged states 第一个交替充电放电周期完全充电状态	using undamaged samples previously used in tests T.1 to T.5 使用试验 T.1 至 T.5 未损坏的样品
	b5#~b8#	after 25 cycles ending in fully charged states 第 25 个交替充电放电周期完全充电状态	
T.8	c11#~c20#	at first cycle, in fully discharged states 第一个交替充电放电周期完全放电状态	-
	c21#~c30#	after 25 cycles ending in fully discharged states 第 25 个交替充电放电周期完全放电状态	-

The test objects of T.1~T.5 and T.7 are battery packs, and the sample numbers are b1#~b8#

T.1~T.5、T.7 的测试对象为电池组, 样品编号为 b1#~b8#。

The test objects of T.6 and T.8 are component cells, and the sample numbers are c1#~c30#

T.6、T.8 的测试对象为组成电芯, 样品编号为 c1#~c30#。

Description of the sampling procedure:

取样程序的说明:

/

Description of the deviation from the standard, if any:

试验结果不符合标准项的说明:

/

Remarks:



备注:

Throughout this report a comma is used as the decimal separator.

本报告中以逗号代替小数点。

Photos of Samples and Labels/样品照片及标识



Battery/电池 (TPSB1B 3,86V 2150mAh 8,3Wh)

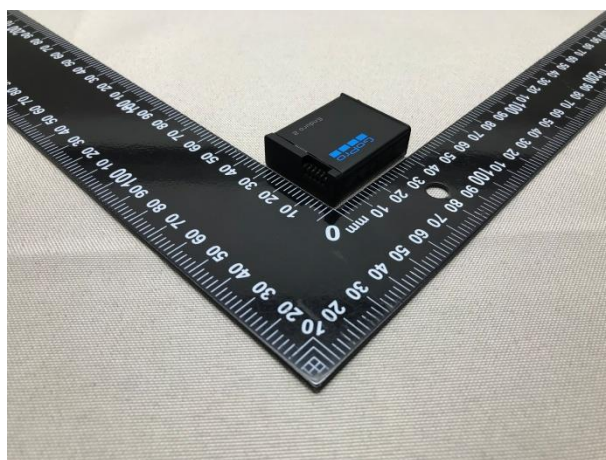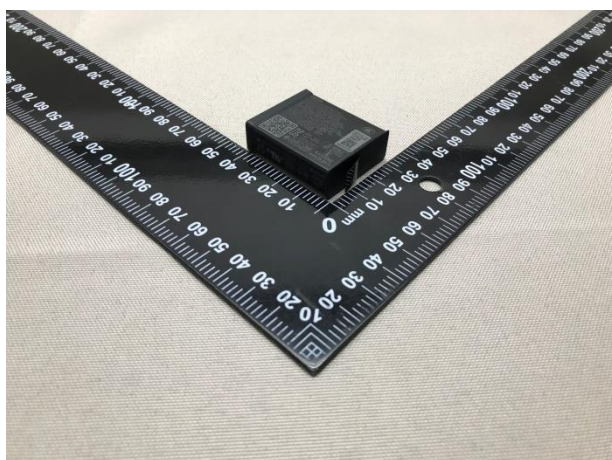

NOMINAL ENERGY/额定能量/額定能量: 8.3Wh

Photos of Samples and Labels/样品照片及标识

Component Cell/内部电芯 (583336 3,86V 1080mAh 4,17Wh)

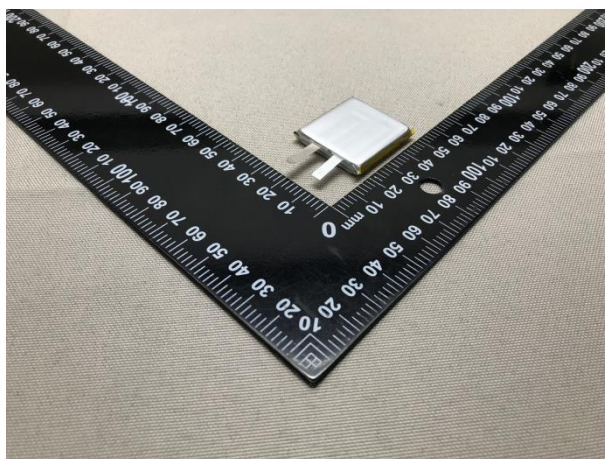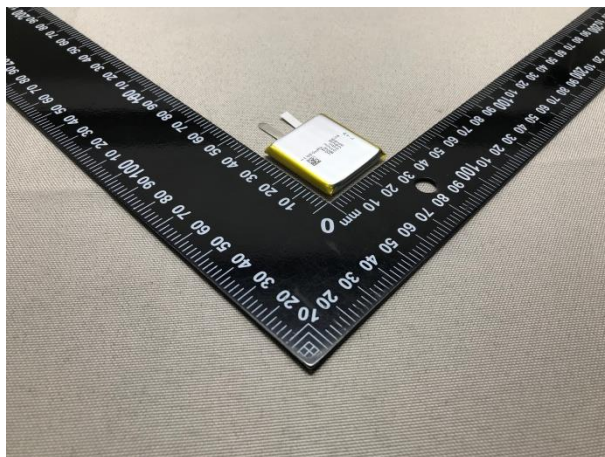

ST/SG/AC.10/11/Rev.8/ Section 38.3			
Clause 章节	Requirements 标准要求	Result 测试结果	Verdict 判定
38.3.4.3	Test T.3: Vibration/试验 T.3: 振动 1 Cells and batteries are firmly secured to the platform of the vibration machine / 电芯和电池牢固地安装在振动台（的台面）上 2 The vibration: a sinusoidal waveform with a logarithmic sweep between 7Hz and 200Hz and back to 7Hz traversed in 15 minutes/振动以正弦波形式，以 7Hz 增加至 200Hz，然后在减少回到 7Hz 为一个循环，一个循环持续 15 分钟的对数前移传送。 3 For cells and small batteries: from 7 Hz a peak acceleration of 1g_n is maintained until 18Hz is reached. The amplitude is then maintained at 0,8mm (1,6mm total excursion) and the frequency increased until a peak acceleration of 8g_n occurs (approximately 50Hz). A peak acceleration of 8g_n is then maintained until the frequency is increased to 200Hz. / 对于电芯和小型电池：从 7Hz 开始，以 1g_n 的峰值加速度保持不变，直到达到 18Hz。然后将振幅保持在 0,8mm（总偏移 1,6mm）并且频率增加直到出现 8g_n 的峰值加速度（大约 50Hz）。然后保持 8g_n 的峰值加速度，直到频率增加到 200Hz。 For large batteries: from 7Hz a peak acceleration of 1g_n is maintained until 18Hz is reached. The amplitude is then maintained at 0,8mm (1,6mm total excursion) and the frequency increased until a peak acceleration of 2g_n occurs (approximately 25Hz). A peak acceleration of 2g_n is then maintained until the frequency is increased to 200Hz. / 对于大型电池：从 7Hz 开始，以 1g_n 的峰值加速度保持不变，直到达到 18Hz。然后将振幅保持在 0,8mm（总偏移 1,6mm）并且频率增加直到出现 2g_n 的峰值加速度（大约 25Hz）。然后保持 2g_n 的峰值加速度，直到频率增加到 200Hz。 4 This cycle repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting position of the cell. One of the directions of vibration must be perpendicular to the terminal face. / 以振动的其中一个方向必须是垂直样品极性，对每个电芯从三个互相垂直的方向上循环 12 次，每个方向 3 个小时，共 9 小时。		P
	Requirements/标准要求 1 Cells and batteries Mass loss limit: ≤0,2% / 样品质量损失≤0,2% 2 Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的 90%，此要求不适用于完全放完电的电池和电芯。 3 No leakage, no venting, no disassembly, no rupture and no fire 样品（电池）应无漏液、无排气、无解体、无破裂以及无着火现象的发生	The samples b1#~b8#: No leakage, no venting, no disassembly, no rupture and no fire/编号为 b1#~b8# 的样品：无漏液、无排气、无解体、无破裂以及无着火现象 The data is shown in Table 1./ 数据见表 1	

ST/SG/AC.10/11/Rev.8/ Section 38.3			
Clause 章节	Requirements 标准要求	Result 测试结果	Verdict 判定
38.3.4.4	Test T.4: Shock/试验 T.4: 冲击 1 Test cells and batteries shall be secured to the testing machine/以稳固的托架固定住每个电芯和电池样品的全部配件表面。 2 Each cell shall be subjected to a half-sine shock of peak acceleration of 150 g_n and pulse duration of 6 milliseconds. Large cells may be subjected to a half-sine shock of peak acceleration of 50 g_n and pulse duration of 11 milliseconds. / 对每个电芯以峰值为 150g_n 的半正弦的加速度撞击，脉冲持续 6 毫秒，大型电芯须经受最大加速度 50g_n 和脉冲持续时间 11 毫秒的半正弦波冲击。 Small batteries shall be subjected to a half-sine shock of peak acceleration of 150 g_n (or Acceleration(g_n)= $\sqrt{\left(\frac{100850}{mass}\right)}$, which is smaller) and pulse duration of 6 milliseconds, large batteries shall be subjected to a half-sine of peak acceleration of 50 g_n (or Acceleration(g_n)= $\sqrt{\left(\frac{30000}{mass}\right)}$, which is smaller) and pulse duration of 11 milliseconds/对每个电池以峰值为 150g_n (或与 $\sqrt{\left(\frac{100850}{mass}\right)}$ 中的较小值) 的半正弦的加速度撞击，脉冲持续 6 毫秒，大型电池须经受最大加速度 50g_n (或与 $\sqrt{\left(\frac{30000}{mass}\right)}$ 中的较小值) 和脉冲持续时间 11 毫秒的半正弦波冲击。 3 Each cell or battery shall be subjected to three shocks in the positive direction followed by three shocks in the negative direction of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks/每个电池或电池组须在三个互相垂直的电池安装方位的正方向经受三次冲击，接着在反方向经受三次冲击，总共经受 18 次冲击。		P
	Requirements/标准要求: 1 Cells and batteries Mass loss limit: ≤0,2% /样品质量损失≤0,2% 2 Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的 90 % ,此要求不适用于完全放完电的电池和电芯。 3 No leakage, no venting, no disassembly, no rupture and no fire 样品（电池）应无漏液、无排气、无解体、无破裂以及无着火现象的发生	The samples b1#~b8# : Acceleration= 150g_n No leakage, no venting, no disassembly, no rupture and no fire/编号为 b1#~b8#的样品: 峰值加速度= 150g_n 无漏液、无排气、无解体、无破裂以及无着火现象 The data is shown in Table 1./数据见表 1	

Table1: T1~T5 / 表 1. 试验 1~试验 5

Sample No. 样品号	Mass prior to test / 试验前质量(g)	OCV prior to test / 试验前电压(V)	Test T.1: Altitude simulation/ 试验 T.1: 高度模拟		Test T.2: Thermal test/ 试验 T.2: 温度试验		Test T.3: Vibration/ 试验 T.3: 振动		Test T.4: Shock/ 试验 T.4: 冲击		Test T.5: External Short Circuit/ 试验 T.5 外部短路
			Mass Loss(%) 质量损失(%)	OCV Retention Ratio(%) 电压保留比(%)	Mass Loss(%) 质量损失(%)	OCV Retention Ratio(%) 电压保留比(%)	Mass Loss(%) 质量损失(%)	OCV Retention Ratio(%) 电压保留比(%)	Mass Loss(%) 质量损失(%)	OCV Retention Ratio(%) 电压保留比(%)	Temp. (°C) 温度 (°C)
b1#	36,429	4,441	0,000	99,91	0,046	98,38	0,000	100,00	0,000	100,00	58,2
b2#	36,404	4,445	0,000	99,91	0,049	98,47	0,000	100,00	0,000	100,00	58,1
b3#	36,402	4,440	0,000	99,89	0,046	98,38	0,000	100,00	0,000	100,00	58,1
b4#	36,425	4,440	0,000	99,89	0,046	98,33	0,000	100,00	0,000	100,00	58,2
b5#	36,435	4,440	0,000	99,91	0,046	98,44	0,000	100,00	0,000	100,00	58,2
b6#	36,457	4,441	0,000	99,86	0,046	98,40	0,000	100,00	0,000	100,00	58,1
b7#	36,327	4,441	0,000	99,86	0,046	98,40	0,000	100,00	0,000	100,00	58,1
b8#	36,403	4,439	0,000	99,93	0,049	98,40	0,000	100,00	0,000	100,00	58,2

Table2: Crush /表 2:挤压											
Test T.6: Crush/试验 T.6:挤压	Sample No. 样品号	c1#	c2#	c3#	c4#	c5#	c6#	c7#	c8#	c9#	c10#
	OCV prior to test / 试验前电压 (V)	3,390	3,919	3,924	3,924	3,922	3,927	3,921	3,924	3,929	3,927
	Temp. (°C) 温度 (°C)	23,6	23,6	23,8	23,7	23,6	23,7	23,7	23,6	23,6	23,6

Table3: Overcharge Test of batteries/ 表 3 过度充电									
Test T.7: Overcharge /试验 T.7: 过度充电	Sample No. 样品号	b1#	b2#	b3#	b4#	b5#	b6#	b7#	b8#
	OCV prior to test /试验前电压 (V)	4,425	4,426	4,424	4,425	4,426	4,427	4,426	4,427

Table 4: Forced discharge / 表 4. 强制放电											
Test T.8: Forced discharge / 试验 T.8: 强制放电	Sample No. 样品号	c11#	c12#	c13#	c14#	c15#	c16#	c17#	c18#	c19#	c20#
	OCV prior to test / 试验前电压(V)	3,387	3,386	3,392	3,391	3,383	3,392	3,392	3,381	3,389	3,397
	Sample No. 样品号	c21#	c22#	c23#	c24#	c25#	c26#	c27#	c28#	c29#	c30#
	OCV prior to test / 试验前电压(V)	3,387	3,383	3,387	3,392	3,388	3,397	3,392	3,387	3,393	3,395

注 意 事 项 Important

1. 报告无检测单位印章无效。
The test report is invalid without the seal of CVC.
2. 未经本试验室书面同意，不得部分地复制本报告。
Nobody is allowed to photocopy or partly photocopy this test report without written permission of CVC.
3. 本报告无批准人、审核人及检测人签名无效。
The test report is invalid without the signatures of Ratifier, Reviewer and Testing engineer.
4. 本报告涂改无效。
The test report is invalid if altered,
5. 对检测报告若有异议，应于收到报告之日起十五天内向检测单位提出。
Objections to the test report must be submitted to CVC within 15 days.
6. 本报告仅对送检样品负责。
The test report is valid for the tested samples only.
7. 判定栏中“-”表示“不需要判定”，“P”表示“通过”，“F”表示“不通过”，“N/A”表示“不适用”。
As for the Verdict, “-” means “no need for judgement”, “P” means “pass”, “F” means “fail” and “N/A” means “not applicable”.

****报告中未加 CMA 标志时，检测数据和结果仅供科研、教学或内部质量控制之用。****
The test data and test results given in this test report should only be used for purposes of scientific research, teaching and internal quality control when the CMA symbol is not presented.

地 址： 广东省广州市科学城开泰大道天泰一路 3 号

广东省广州市黄埔区光谱东路 179 号百事高智慧园 D 栋（测试地点）

Lab Address: No.3, Tiantai 1st Road, Kaitai Avenue, Science City, Guangzhou, Guangdong, China.

Testing Location: Building D, BASIGO INTELLIGENT, No.179, Guangpu East Road, Huangpu District, Guangzhou, P. R. China.

电 话(Tel): 020 32293888

邮政编码(Post Code): 510663

传 真(FAX): 020 32293889

E-mail: office@cvc.org.cn

<http://www.cvc.org.cn>